PHOENIX METAL PRODUCTS, INC.
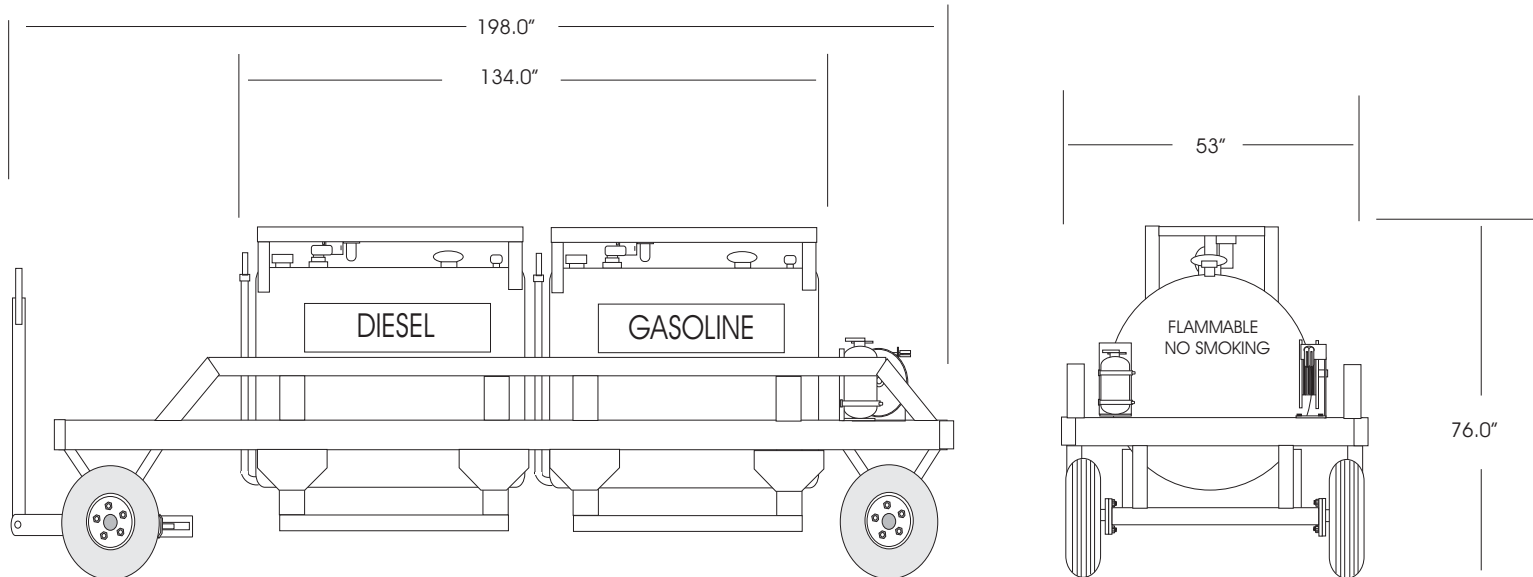
PNX-FSC300-2   Fuel Service Cart

The Phoenix Metal Products, Inc FSC300-2 is a fuel servicing cart for Diesel and Jet A fuels, with (2) 300 gallon-double wall construction tanks. Both tanks have separate pumps, meters, filters and emergency

separate pumps, meters, filters and emergency venting and fill ports. The double wall construction eliminates the need for a containment berm. The cart utilizes a fifth wheel steering system and is constructed using heavy wall structural steel. The tanks are mounted on (4) shock isolators. All applicable placarding for the specified fluid types are provided. The transfer pump is powered by a connection from the towing vehicle. The pump is U.L. labeled is explosion-proof. Safety features include rollover protection, heavy wall side protection, Purple K fire extinguisher and a grounding reel.

PNX-FSC300-2   Fuel Service Cart

198.0"

134.0"

53"

DIESEL

GASOLINE

FLAMMABLE
NO SMOKING

76.0"

Specifications

Chassis:

* 3 x 2 x 3/16 Wall structural tubing
* 5200 LB Axles
* Fifth wheel steering
* Locking front brake
* Shock isolating mounts
* 4.00 x 8 Soft ride tires

Tanks:

* (2) 300 gallon capacity
* 12 Gauge double wall construction
* Level gauge
* Containment tank leak gauge

* (1) 4" Emergency vent
* (1) Standard vent
* (1) 2" Self closing Fill cap
* Electric Fuel Transfer Pump - 12V DC Explosion proof
* Resettable meter
* Fuel filter
* Hose with positive closing squeeze nozzle
* Roll over protection

Safety:

* Grounding cable reel with 75' and Y branch
* 20 LB Purple K fire extinguisher
* Placarding per fluid type
* Electric pump wired to meet NEMA 4
* Weatherproof electrical plug for fuel pump power from towing vehicle

Dimensions:

Length	198.00"
Width	52.00"
Height	76.00"
Weight	4500 lbs

Specifications Subject to Change Without Notice.